


Features

This controller adopt the widely used 433MHz wireless technology with the features of low power consumption, long signal transmitting and strong anti-interference, etc. Widely used on the controlling of hotel lighting and home lighting.

Dim brightness

Remote control
Control distance 30m

433MHz
433MHz RF wireless
transmission technology

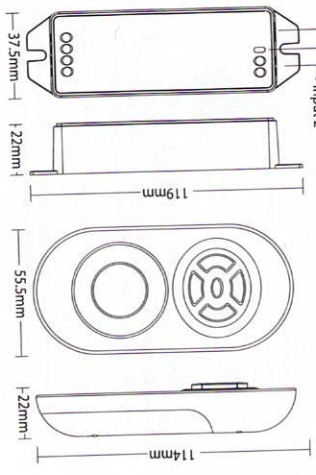


Parameters

Remote Control
Working Voltage: 3V (2 x AAA batteries)
Working Temp.: -20~60°C
RF: 433MHz
Standby Power: 20uA

Strip Controller
Input Voltage: DC12V~24V
Output: 12A/Channel
Total Output: Max 12A
Working Temp.: -20~60°C

Transmitting Power: <10mW
Modulation Method: ASK
Control distance: 30m

Products Key Diagram

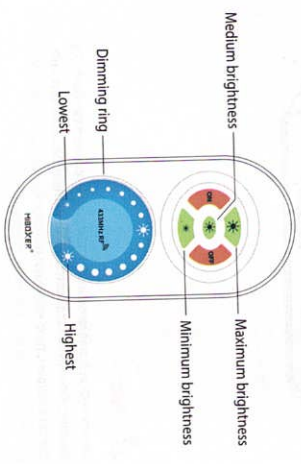

Connect diagram


Pilot lamp instruction:
Always lighting means working normally. Flash means receiving remote signal.



Note

Factory setting is one remote control one receiver. Users can group it as per the need. One remote can control countless receivers, but one receiver just can be controlled by max 4 remotes.


Linking the controller

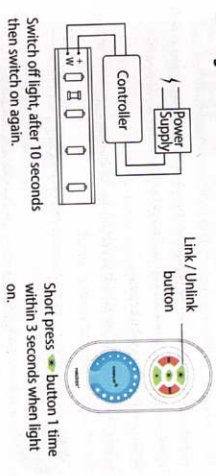

Lights blink 3 times slowly means linking is done successfully.

If the light not blink slowly, the linking failed. Please switch off the light again, and follow the above steps again.

Unlinking the controller

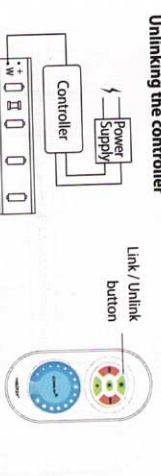

Short press button 5 times within 3 seconds when light on.

Lights blink 6 times quickly means unlinking is done successfully.

If the light not blink quickly, the unlink failed. Please switch off the light again, and follow the above steps to unlink again.