

EFI-P4 A 40/0.03



Specificatii

Cod ETI	002061512
Descriere	EFI-P4 A 40/0.03
Denumire clasă	Înterupător diferențial
Curent de defect nominal (A)	0.03A
Tip	A
Curent nominal (A)	40A
Adâncime (mm)	68mm
Tip montaj	TH 35
Număr de poli	3+N
Curent nominal de scurtcircuit Inc (kA)	10kA
Tensiune nominală AC (V)	400V/415V
Tensiune nominală DC (V)	400V/415V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm ² -25mm ²
Standarde	IEC/EN 61008
Grad de protecție IP	IP20

Pagina de produse online

Alta documentatie



Catalog caracteristici tehnice

Certificate

Model 3D

2D mușchi

Manual de instrucțiuni

Declaratie CE


White paper

Eplan mușchi

ETIM clasificare internațională

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	415V
Rated current	40A
Rated fault current	30mA
Mounting method	DIN rail
Leakage current type	A
Selective protection	
Short-time delayed tripping	
Short-circuit breaking capacity (I _{cw})	10kA
Surge current capacity	0,4kA
Frequency	50/60 Hz
Additional equipment possible	1
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	68mm
Connectable conductor cross section multi-wired	1...25mm ²

Desen cotat

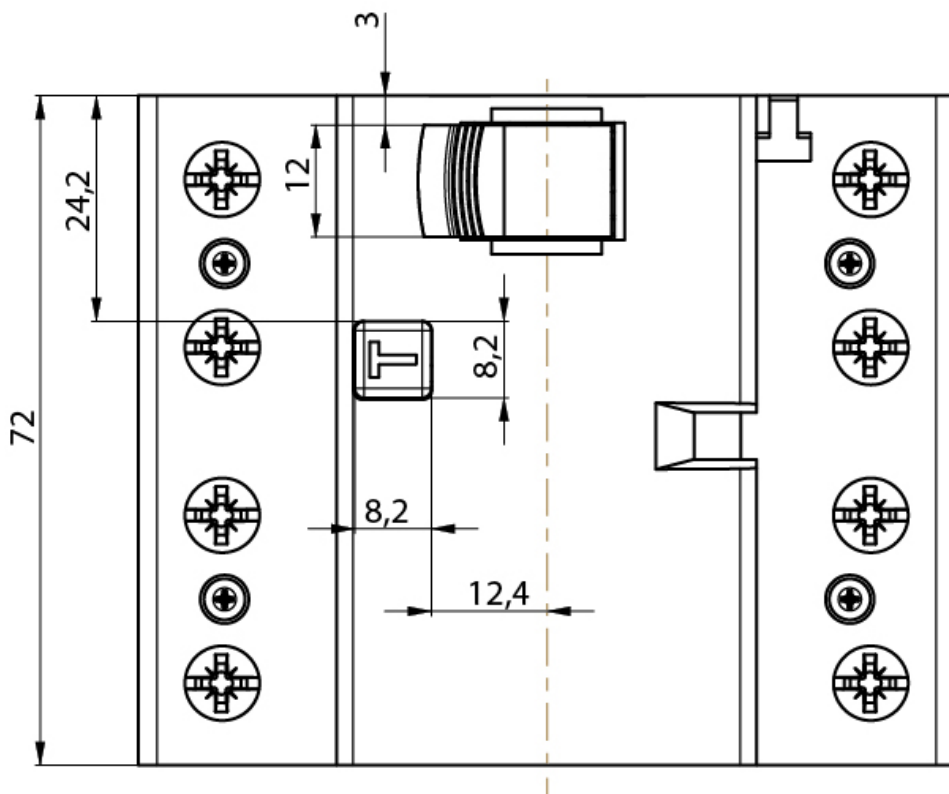

Schema de conexiuni

