

ETIMAT P6 3p+N B40



Specificatii

Cod ETI	001900414
Descriere	ETIMAT P6 3p+N B40
Denumire clasă	Disjunctori miniaturali
Curent nominal (A)	40A
Caracteristică de întrerupere	B
Număr de poli	3+N
Capacitatea de rupere (kA)	6kA
Tipul voltajului	AC
Tensiunea nominală de rezistență Uimp (kV)	6kV
Tensiune nominală AC (V)	415V
Tensiune nominală DC (V)	415V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm ² -25mm ²
Standarde	60898-1, 60947-2
Funcție	MCB

[Pagina de produse online](#)


Alta documentatie

[Catalog caracteristici tehnice](#)[Model 3D](#)[2D mușchi](#)[Manual de instrucțiuni](#)[Declarație CE](#)[Eplan mușchi](#)


ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	4
Number of protected poles	3
Rated current	40A
Rated voltage	415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	4
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

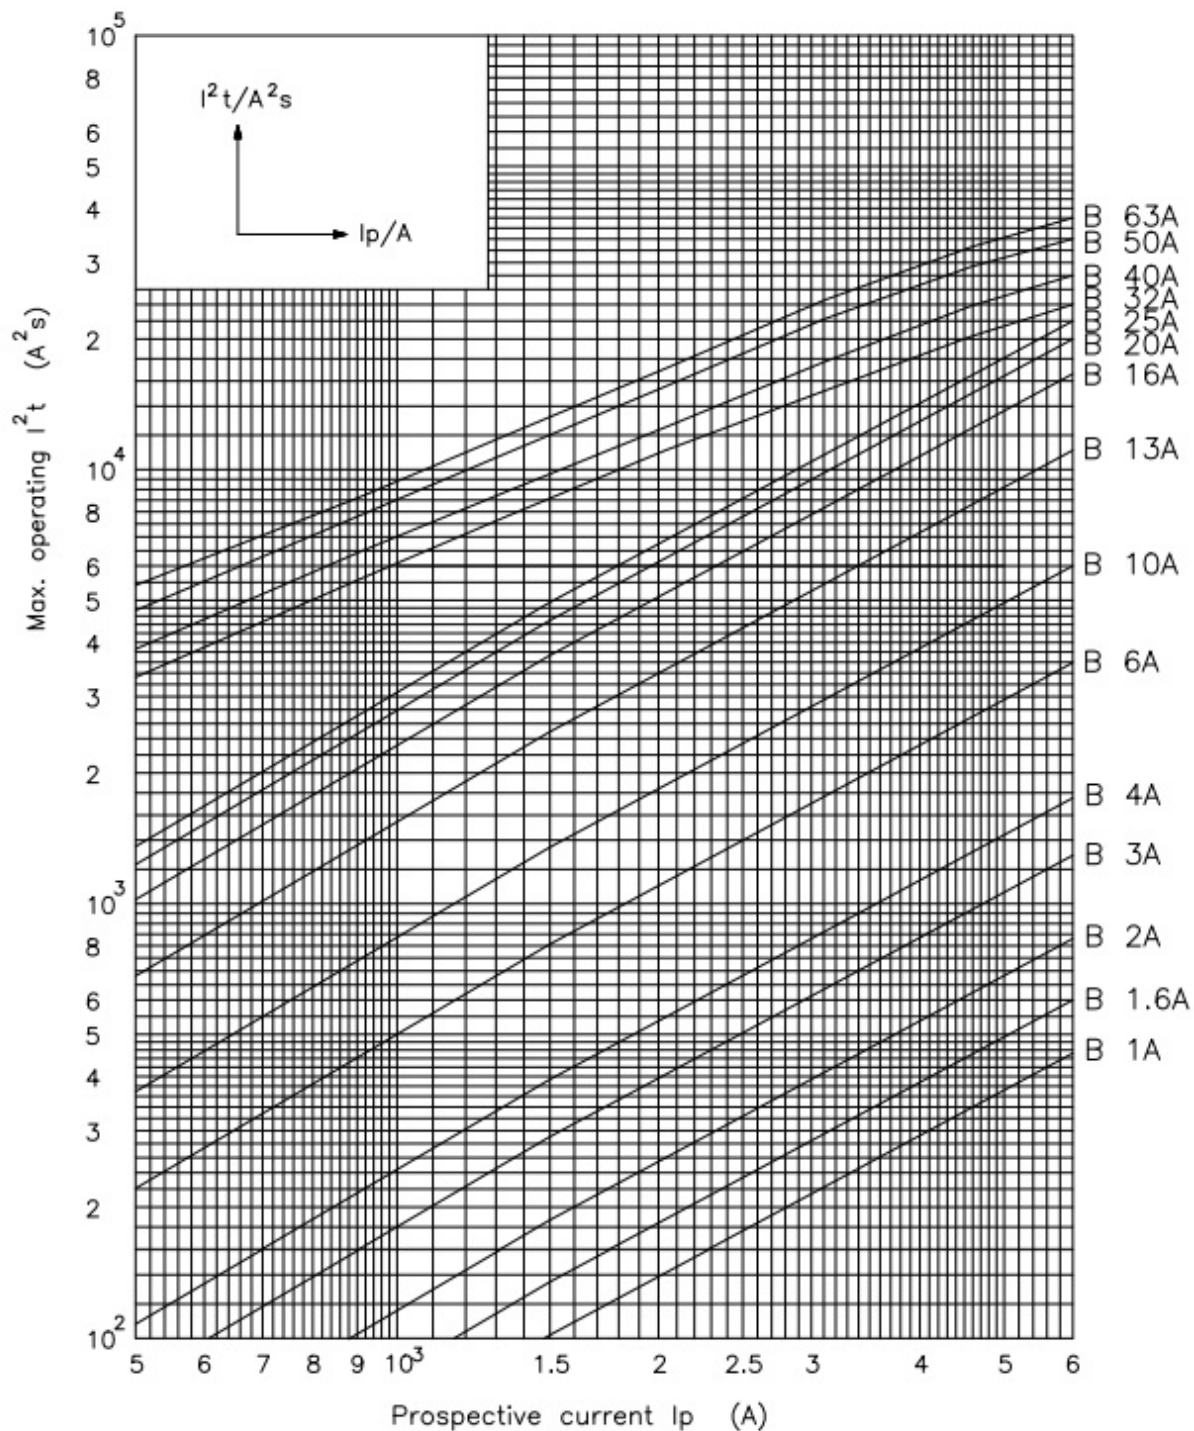

Desen cotat

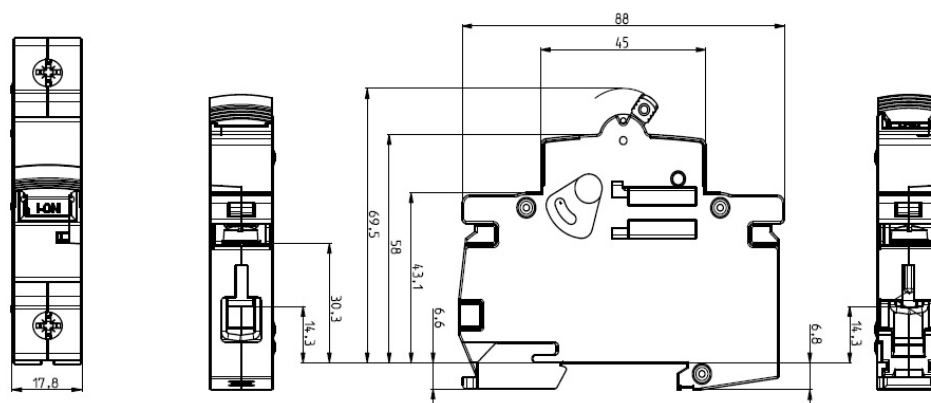

Simbol/Conexiune

1p



1p+n



2p



3p



3p+n

