

ETIMAT P6 3p B16



Specificatii

Cod ETI	001900310
Descriere	ETIMAT P6 3p B16
Denumire clasă	Disjunctori miniatural
Curent nominal (A)	16A
Caracteristică de întrerupere	B
Număr de poli	3
Capacitatea de rupere (kA)	6kA
Tipul voltajului	AC
Tensiunea nominală de rezistență Uimp (kV)	6kV
Tensiune nominală AC (V)	415V
Tensiune nominală DC (V)	415V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm ² -25mm ²
Standarde	60898-1,60947-2
Funcție	MCB

Pagina de produse online 

Alta documentatie



Catalog caracteristici tehnice

Model 3D

2D mușchi

Manual de instrucțiuni


Declarație CE

Eplan mușchi


ETIM clasificare internationala

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	3
Number of protected poles	3
Rated current	16A
Rated voltage	415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	3
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

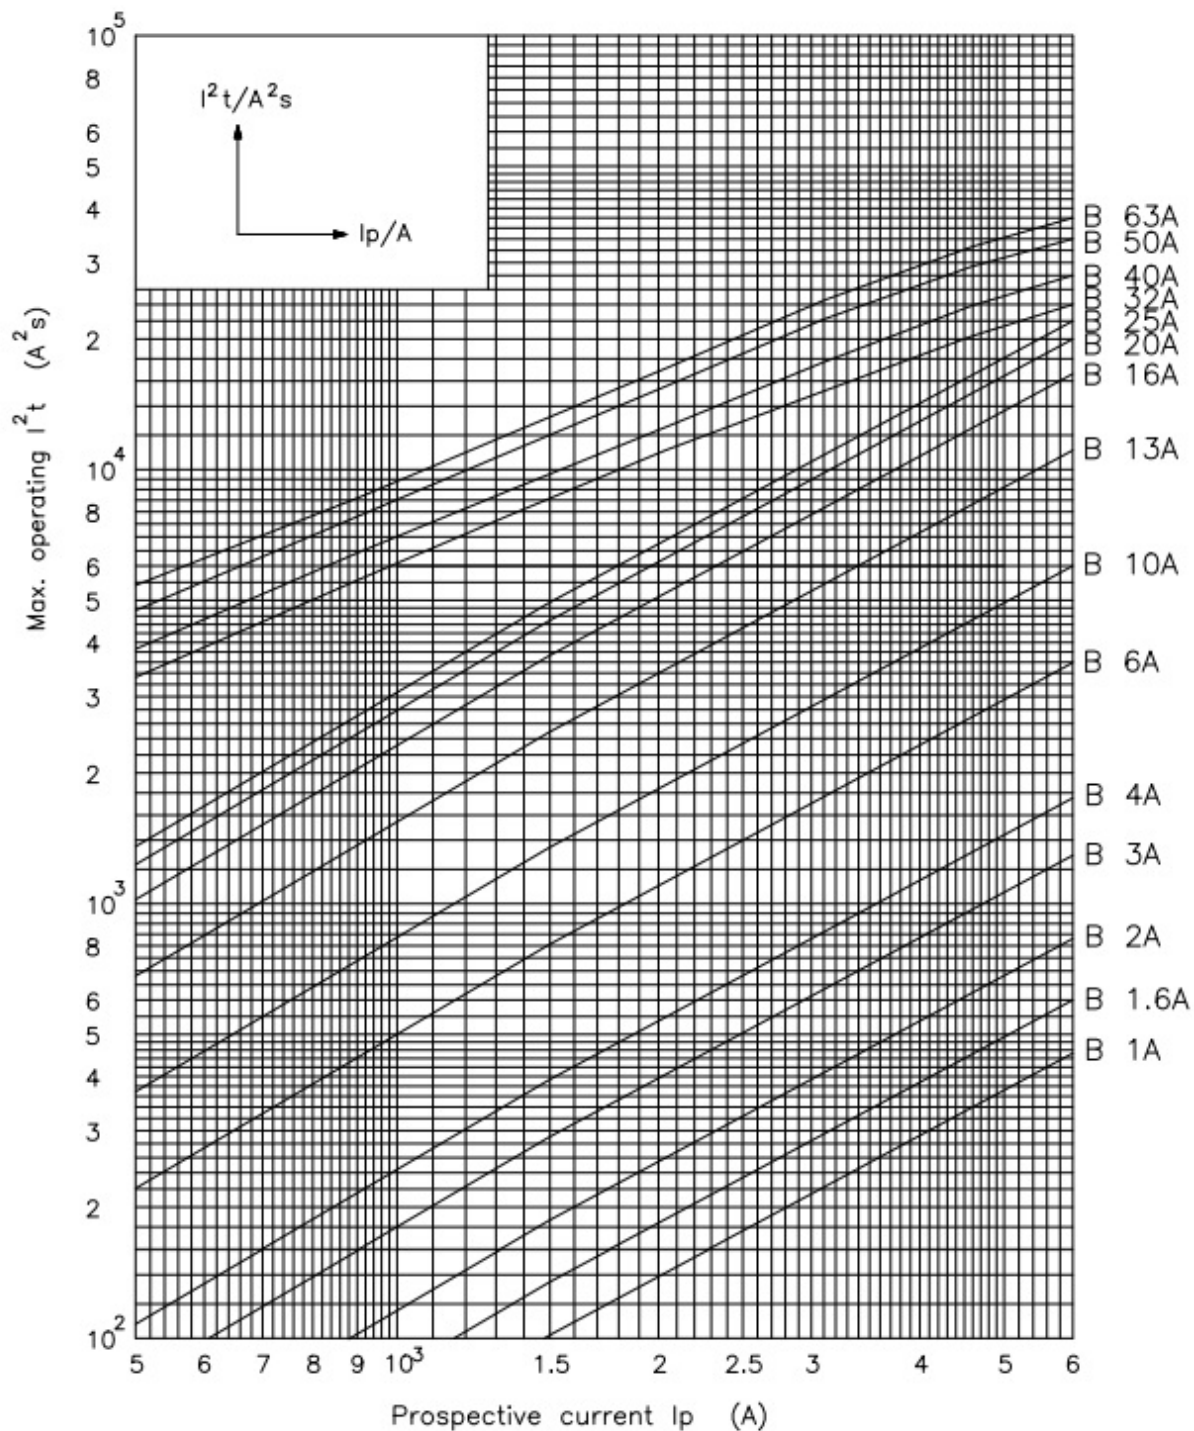

Desen cotat

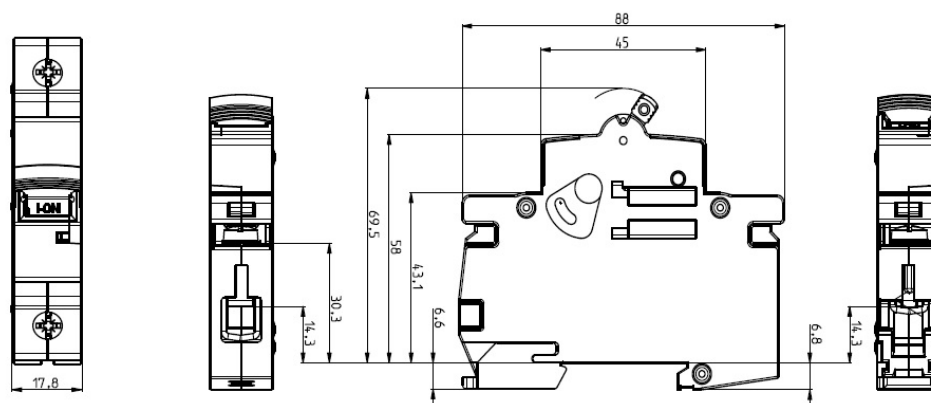

Simbol/Conexiune

1p




1p+n



2p



3p



3p+n

