



Equipotential bar

Cat. no.
99201199

Type
92.1.1

Material
other

Used in surge protection and electric shock installation. Enables direct equipotential bonding between earthing and conducting parts such as piping, reinforcement bars, construction parts of building, covers of electrical devices. Equipotential bar is to get similar potential on conducting parts in the normal work conditions, either in case of installation defects and failure of electric devices.

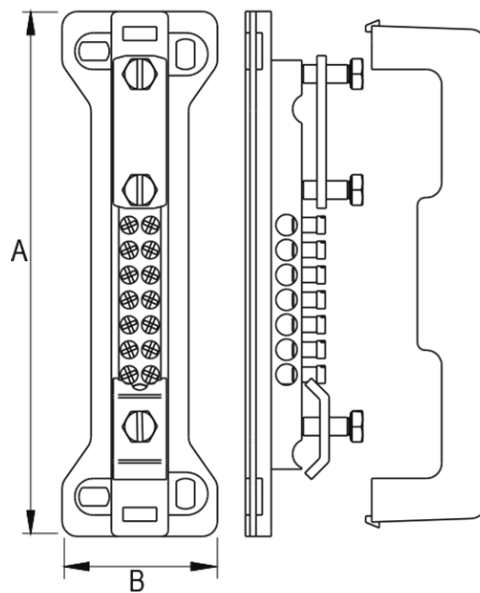

TYP	A	B	CONNECTION OPTIONS	VERSION
92.1.1	170	50	14×16 mm ² , 1×50 mm ² , 1×tape conductor max. 30×4 mm	double-row