


Data sheet

Part No.	SB HG
Description	normal bend for the connection of rigid conduits in an angle of 90°, especially für enclosed installations
Colour	light grey, similar to RAL 7035



Standard: EN 61386-1, EN 61386-21

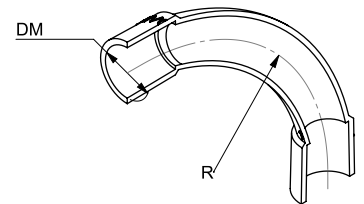

UV-Level*

L1

Art. no.	For tube diameter	Radius	ps	pl
020 622	16 mm	50 mm	50 pc	400 pc
020 623	20 mm	70 mm	25 pc	300 pc
020 624	25 mm	95 mm	20 pc	160 pc
020 625	32 mm	125 mm	50 pc	1200 pc
020 626	40 mm	160 mm	35 pc	840 pc
020 627	50 mm	210 mm	20 pc	480 pc
065 499	63 mm	270 mm	8 pc	280 pc

Further technical details

Details	
Model	Plug-in
With inspection opening and cover	False
Angle of bow	90 °
Material	PVC-U

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.