

EFI-4 A 80/0.03



Specificatii

Cod ETI	002062545
Descriere	EFI-4 A 80/0.03
Denumire clasă	Înterupător diferențial
Curent de defect nominal (A)	0.03A
Tip	A
Curent nominal (A)	80A
Adâncime (mm)	68mm
Tip montaj	TH 35
Număr de poli	3+N
Curent nominal de scurtcircuit Inc (kA)	10kA
Tensiune nominală AC (V)	415V
Tensiune nominală DC (V)	415V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm ² -25mm ²
Standarde	IEC/EN 61008
Grad de protecție IP	IP20

[Pagina de produse online](#)


Alta documentatie

[Catalog caracteristici tehnice](#)[Certificate](#)[Model 3D](#)[2D mușchi](#)[Manual de instructiuni](#)[Declaratie CE](#)[White paper](#)[Eplan mușchi](#)

ETIM clasificare internationala

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	415V
Rated current	80A
Rated fault current	30mA
Mounting method	DIN rail
Leakage current type	A
Selective protection	1
Short-circuit breaking capacity (Icw)	10kA
Frequency	50/60 Hz
Additional equipment possible	1
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	68mm
Ambient temperature during operating	-25...55°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Desen cotat

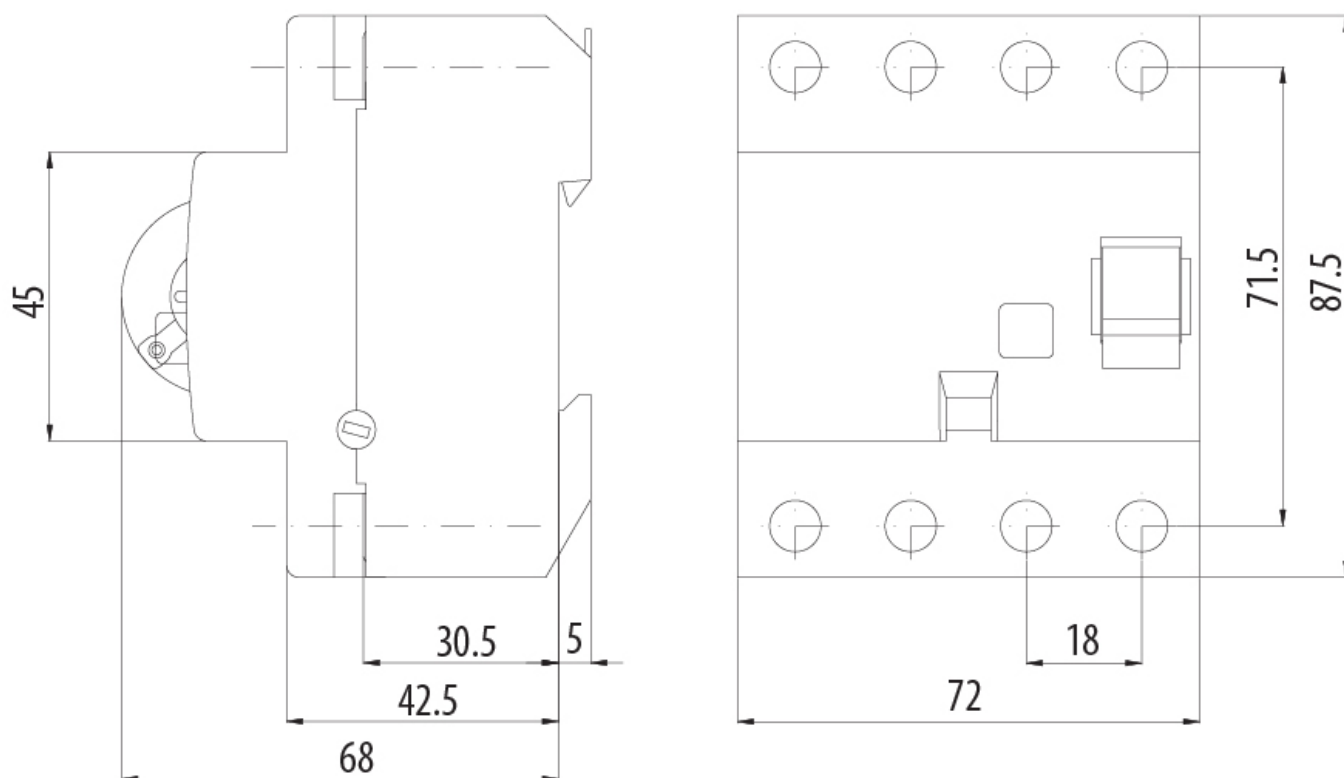

EFI-4 16-80 A